The new degree of comfort.™

Fury™ direct vent gas water heaters use outside air for combustion, offer longer venting options and a coaxial vent for easy installation

Efficiency

- .58 EF
- Well insulated for reduced stand-by heat loss

Performance

- FHR: 80 gallons for 50-gallon model
- Recovery rate is 38.4 gallons at a 90 degree rise for both models

Technology



- Adjustable coaxial vent allows flexibility of installation, can swivel 360 degrees and uses outside air for combustion and requires no electrical power
- Aluminum vent and cap base to prevent staining of building exterior

Longer Venting

- Up to 4 feet above the water heater and 4 feet from an outside wall
- Order Horizontal Vent Kit: #SP20131
- Order Vertical Vent Kit: #SP20132

Guardian System™ & Sensor

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation

Low Emissions

- Meets 40 ng/J NOx requirements

Longer Life

- Patented magnesium anode rod with resistor protects the tank from rust

Plus…

- Brass drain valve and temperature and pressure relief valve are included
- Exclusive Rheemglas® tank lining resists corrosion and prolongs tank life
- Heat saving flue baffle design
- Gas control and combination thermostat
- Piezo ignition
- High temperature silicone bands reduce venting installation time
- Internal air tube for reduced footprint

Warranty

- 6-Year limited tank and 1-year limited parts warranty*

*See Residential Warranty Certificate for complete information

Fury Direct Vent

50-Gallon Capacity
Up to 38,000 Btu/h
Natural and LP Gas

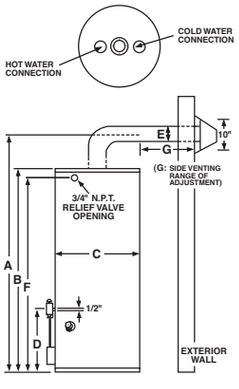

VENTING – ROUGHING IN DIMENSIONS (INCHES)		SIDE VENTING (G) WITH INCLUDED VENT KIT		SIDE VENTING (G) WITH OPTIONAL VENT KIT		OPTIONAL HEIGHT (A) WITH VENT KIT
MODEL NUMBER	4 FEET VENTING AVAILABLE	MIN.	MAX.	MIN.	MAX.	
RH DV50FV	Horizontal & Vertical	8-1/8	18-1/8	8-1/8	48**	68 – 107†

DESCRIPTION		FEATURES			DIMENSIONS						ENERGY INFO.	
GALLON CAPACITY	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H NAT.	RECOVERY IN G.P.H. 90° RISE NAT.	FIRST HOUR DEL. G.P.H. NAT.	HT. TO VENT A	TANK HT. B	DIAMETER C	HT. TO GAS CONN. D	VENT SIZE E	HT. TO SIDE T&P F	SHIP. WT. (LBS)	ENERGY FACTOR NAT.
50	RH DV50FV	38	38.4	80	68	59-1/2	21-3/4	14-1/4	6	52-1/2	165	0.58

If side wall is combustible material, 1" clearance must be included in adjustment range.
Specify LP gas when ordering. Add "PF" suffix to the model number. Example RH DV50PFV.
** Horizontal Vent Kit #SP20131. Venting dimensions are approximate.
† Vertical Vent Kit #SP20132. Venting dimensions are approximate.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com

PRINTED IN U.S.A. 04/13 WP FORM NO. 101-22CAN Rev. 25

101-22CANRev25.indd 1 4/8/13 2:06 PM