The new degree of comfort.™

The Fury® electric water heater line is engineered for longer life – resistored heating elements and premium grade anode rod

Efficiency

- Stand by watts loss 62 - 87
- Isolated tank design reduces conductive heat loss
- High efficiency resistored heating element for added protection to prolong anode rod and tank life



Performance

- FHR: 42 - 99 gallons, based on gallon capacity
- Recovery rate is 21 gallons at a 90 degree Fahrenheit rise**

High Efficiency Models Feature

- High performance and lower operating cost
- Compliant with many electric utility incentive programs
- Anode rod equalizes aggressive water action and prolongs the life of the water heater

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature

Plus…

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life

- Brass drain valve
- Temperature and pressure relief valve included

Warranty

- 6-Year limited tank and 1-year limited parts warranty*

*See Residential Warranty Certificate for complete information

Fury
30 to 63-Gallon Capacities
240 Volt AC/Single Phase
Double and Single Element Models
Electric

†LEED Point = 1

See dimensions chart on back.

DESCRIPTION				FEATURES						ROUGHING IN DIMENSIONS					
	STORAGE CAPACITY			HEATING ELEMENTS									ESTIMATED SHIPPING WEIGHT		
	IMP.		ELEM.	120 VOLT		208 VOLT		240 VOLT		HEIGHT (IN.)	OUTSIDE DIAMETER (IN.)	HT. TO DRAIN VALVE (IN.)			STANDBY WATTS
MODEL NUMBER	GALS.	LITRES	QTY.	WATTAGE	AMPS	WATTAGE	AMPS	WATTAGE	AMPS	A	B	C	LBS.	KG	LOSS
TOP INLET															
RR317T	30	135	2	1500	12.5	2250	10.8	3000	12.5	46-1/2	19-3/4	3-1/2	105	48	62
RR415TM†	37.5	170	2	1500	12.5	2250	10.8	3000	12.5	46	21-3/4	3-1/2	117	53	66
RR615TM†	60	270	2	N/A	N/A	3380	16.3	4500	18.8	59	23	3-1/2	177	80	87
RR620TM†	60	270	2	N/A	N/A	3380	16.3	4500	18.8	58	24-5/16	3-1/2	188	85	72
SIDE INLET															
RR415BC-2†	38.5	175	2	N/A	N/A	2250	10.8	3000	12.5	47	21	3-1/2	124	56	64
RR615BC-2†	60	270	2	N/A	N/A	3380	16.3	4500	18.8	58	23	3-1/2	174	79	83

**Recovery = wattage/2.42 x temp. rise °F.
Example: $\frac{4500W}{2.42 \times 90°} = 21$ GPH

**Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

†LEED Point = 1

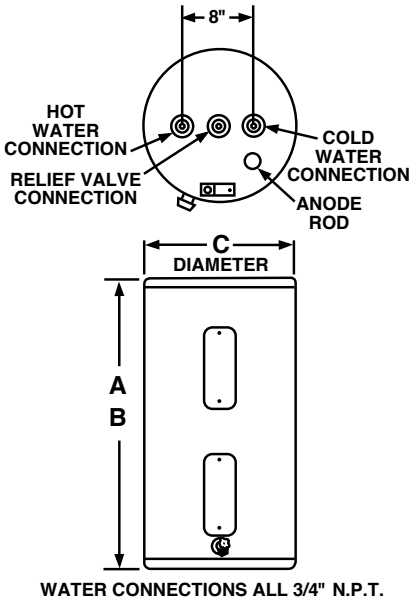

WATER CONNECTIONS ALL 3/4" N.P.T.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com