The new degree of comfort.™

Fury® heavy duty gas water heaters feature the Guardian System – engineered to exceed ANSI standards for flammable vapor ignition resistance

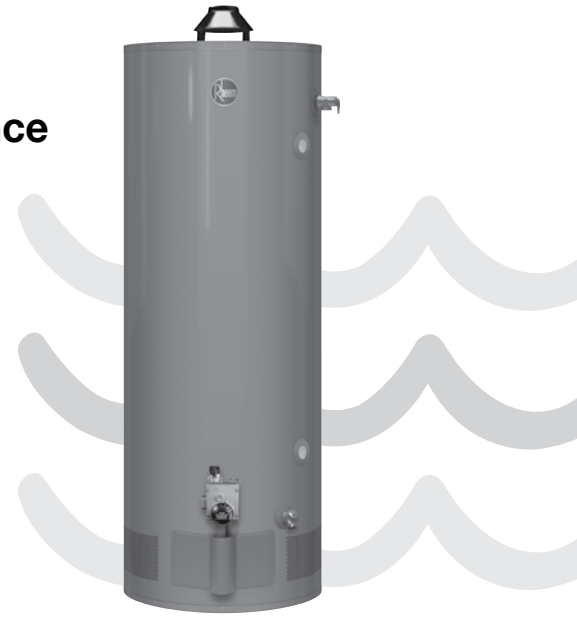

Efficiency

- 0.53 - 0.56 EF

Performance

- FHR: Up to 141-gallons for natural gas, up to 109-gallons for LP gas
- Recovery: Up to 75.8 gallons for natural gas, up to 65.7 gallons for LP gas at a 90 degree rise

Guardian System™ & Sensor

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation

Combustion Shut-off System



Flame Arrestor Plate

Maintenance Free

Self-Cleaning

- 60-Gallon models only
- EverKleen™ patented system fights sediment build-up
- Reduces fuel costs
- Fights sediment build-up

Easy to Light

- Piezo Ignitor - no matches required

Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

Longer Life

- Patented magnesium anode rod with resistor protects the tank from rust

High Altitude Compliant

- All models are certified for applications up to 7,700 feet above sea level

Plus…

- Brass drain valve and temperature and pressure relief valve are included
- Side water connections for space heating applications for 75-gallon models
- Standard replacement parts

Warranty

- 6-Year limited tank and 1-year limited parts warranty*

*See Residential Warranty Certificate for complete information

Fury Heavy Duty

60 and 75-Gallon Capacities
Natural and LP Gas

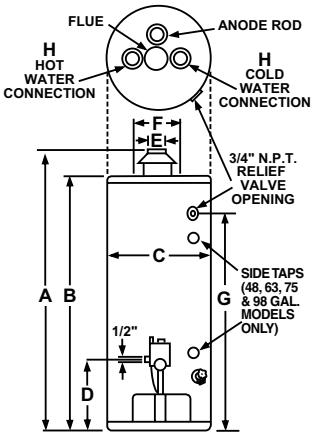

DESCRIPTION		FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)									ENERGY INFO.
GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.		HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P G	WATER CONN. H	SHIP. WT. (LBS)	ENERGY FACTOR
		NAT.	LP	NAT.	LP	NAT.	LP										
60	RR60-51FV	50	50	50.5	50.5	107	107	62	58	23	13-1/4	4	8	48-1/2	3/4	180	0.56
75	RR75-75FV	75.1	65	75.8	67.7	141	109	64	60	26-1/4	14-3/4	4	11	53-1/4	1	320	0.53

Specify LP gas when ordering. Add "P" suffix to the model number. Example: RR60-51PFV

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com

PRINTED IN U.S.A. 01/13 WP FORM NO. 101-13CAN Rev. 10