



The new degree of comfort.™



Residential Gas
Professional Classic Plus
Heavy Duty Water Heaters

Professional Classic Plus™ Heavy Duty gas water heaters exceed ANSI standards for flammable vapor ignition resistance

Efficiency


- .49 - .58 EF

Performance

- FHR: Up to 135 gallons for natural gas, up to 125 gallons for LP gas
- Recovery: Up to 75.8 gallons for natural gas, up to 65.7 gallons for LP gas at a 90 degree rise

Guardian System™ & Sensor

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation



Combustion Shut-off System



Flame Arrestor Plate



Maintenance Free

Self-Cleaning

- 48, 60 & 63 gallon models only
- EverKleen™ patented system fights sediment build-up



- Reduces fuel costs
- Fights sediment build-up

Easy to Light

- Piezo Ignitor - no matches required

Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

Longer Life

- Rheem exclusive R-Tech (resistored) anode rod provides long-lasting tank protection

High Altitude Compliant

- All models are certified for applications up to 7,700 feet above sea level
- Some models are certified up to 10,200 feet above sea level (check factory for listings)

Plus...

- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Side water connections for space heating applications for 48, 63, 75 and 98-gallon models
- Standard replacement parts

Warranty

- 8-Year limited tank and parts warranty*
- With ProtectionPlus™ the 8-year limited tank warranty becomes 12-year

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



Professional Classic Plus Heavy Duty

48, 60, 63, 75 and 98-Gallon Capacities
Up to 75,100 Btu/h
Natural and LP Gas



myrheem.com/proclub

See dimensions chart on back.



INTEGRATED HOME COMFORT



The new degree of comfort.™




Residential Gas
Professional Classic Plus
Heavy Duty Water Heaters

Professional Classic Plus™ Heavy Duty Specifications

TYPE	GAL. CAP.	DESCRIPTION MODEL NUMBER	FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)									ENERGY INFO.	
			GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.		HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P VALVE G	WATER CONN. SIZE H	SHIP. WT. (LBS)	ENERGY FACTOR	
			NAT.	LP	NAT.	LP	NAT.	LP									NAT.	LP	
Tall	48	PRO+G48-65N RH58	65		65.7		98		62-1/2	58-1/2	21-3/4	14	4	11	51-3/4	3/4	180	0.58	0.58
Tall	48	PRO+G48-48P RH58		48		48.5		88	62-1/2	58-1/2	21-3/4	14	4	11	51-3/4	3/4	180		0.58
Tall	60	PRO+G60-50N RH56	50		50.5		107		62	58	23	13-1/4	4	8	48-1/2	3/4	180	0.56	
Tall	60	PRO+G60-45P RH56		45		45.5		107	62	58	23	13-1/4	4	8	48-1/2	3/4	180		0.56
Tall	63	PRO+G63-65N RH55	65		65.7		115		65	61-1/4	23	14	4	11	54-3/4	3/4	225	0.55	
Tall	63	PRO+G63-50P RH55		50		50.5		110	65	61-1/4	23	14	4	11	54-3/4	3/4	225		0.55
Tall	75	PRO+G75-75N RH	75.1		75.8		141		64	60	26-1/4	14-3/4	4	11	53-1/4	1	320		
Tall	75	PRO+G75-65P RH53		65		65.7		109	64	60	26-1/4	14-3/4	4	11	53-1/4	1	320		0.53
Tall	98	PRO+G98-75N RH49	75		75.8		135		67-3/4	64	27-1/4	14-3/8	4	11	57-3/16	1	350	0.49	
Tall	98	PRO+G98-65P RH49		65		65.7		125	67-3/4	64	27-1/4	14-3/8	4	11	57-3/16	1	350		0.49

Energy Factor based on D.O.E. (Department of Energy) test procedures.

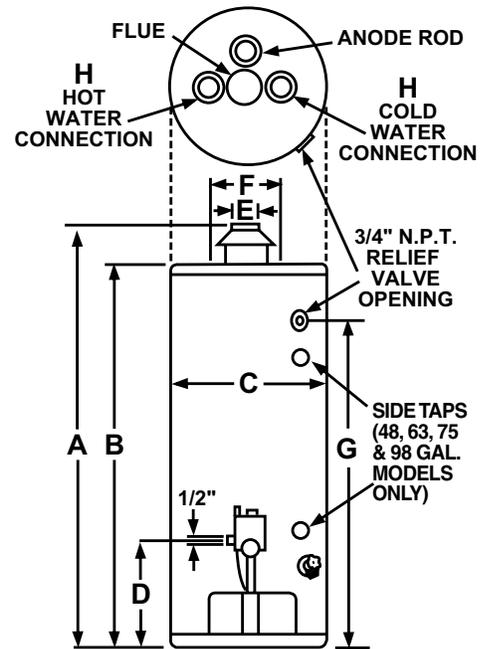

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com



INTEGRATED HOME COMFORT